




# How to clean a Audiovox CDM 9000

How to disassemble and clean the Audiovox CDM-9000

Written By: Summer Sines

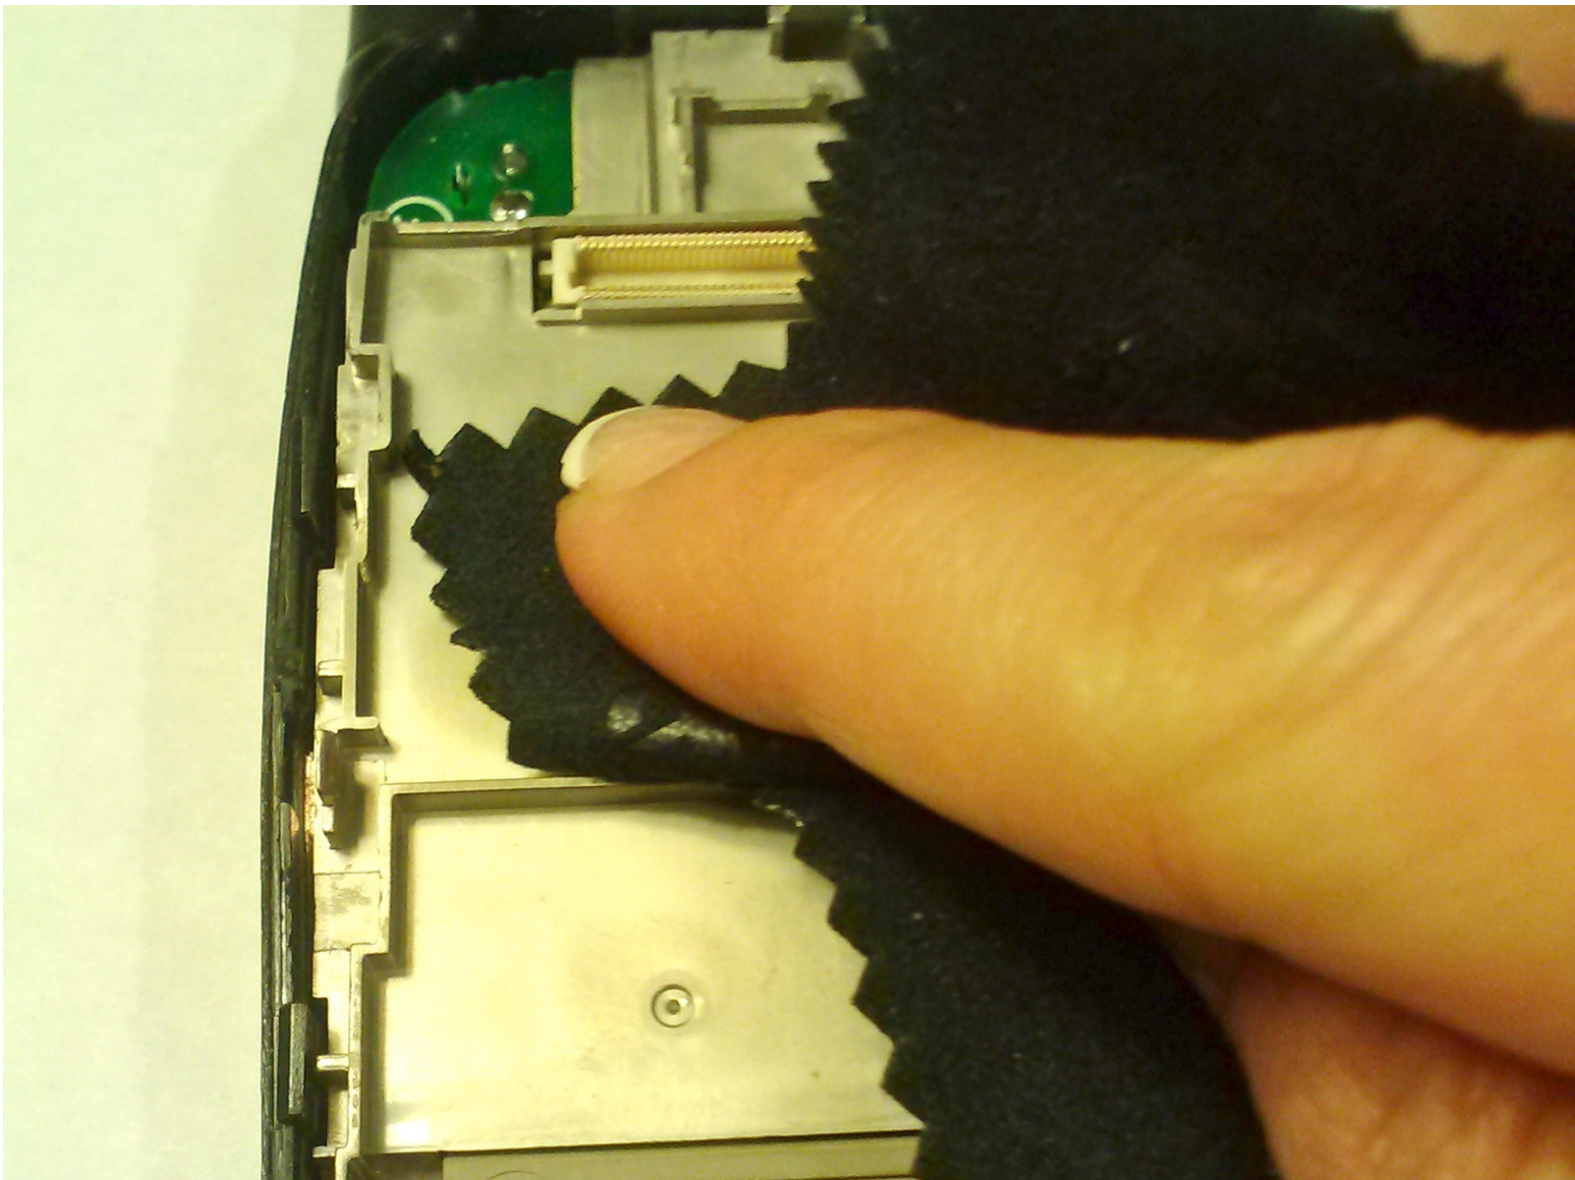

## INTRODUCTION

The Audiovox was released in December 1998. This a how to guide on cleaning the Audiovox.


---



### TOOLS:


- [Pair of tweezers and a tooth brush](#) (1)
-

## Step 1 — How to clean a Audiovox CDM 9000

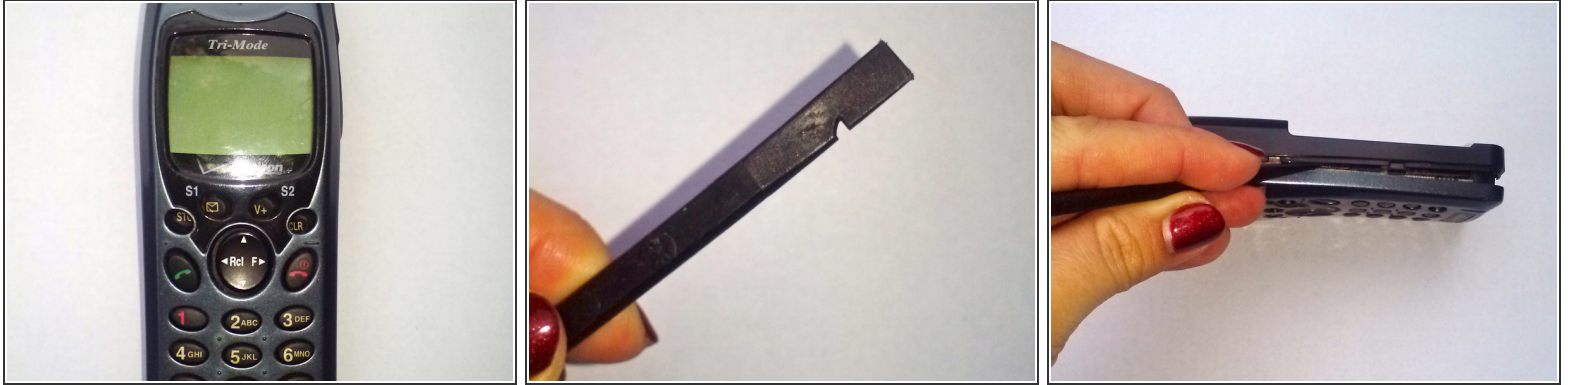

- Place the device so the screen is facing up.
- Use a spudger tool to pry apart the phone. It may be a little difficult to pry open. Use the flat part of the spudger tool and go all around the phone.


## Step 2

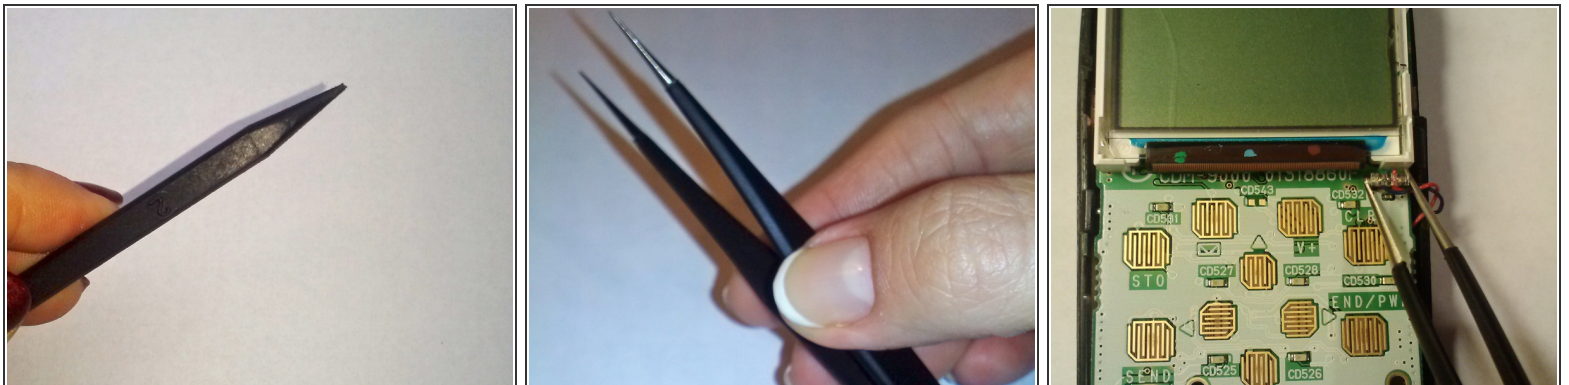

- Using the pointer end of the spudger, go around the phone prying apart the Intel piece.
- Use some tweezers to pull out the little plastic piece with the black and red wires. Now you can completely remove the Intel piece.




### Step 3

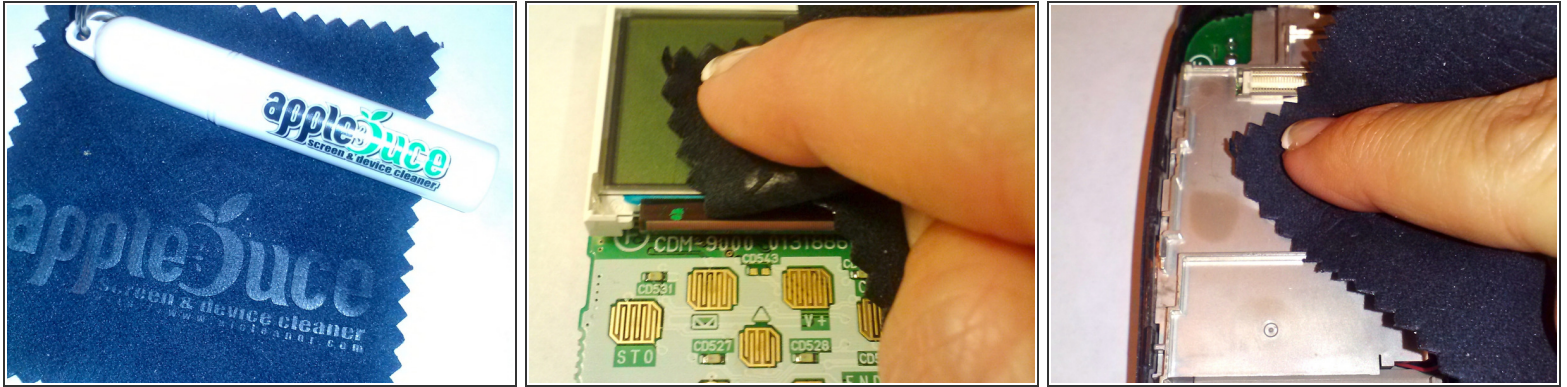

- Use a screen and device cleaner to wiping down the device.
- Use screen cleaning spray, and a microfiber type cloth. These will not scratch the screen.

### Step 4

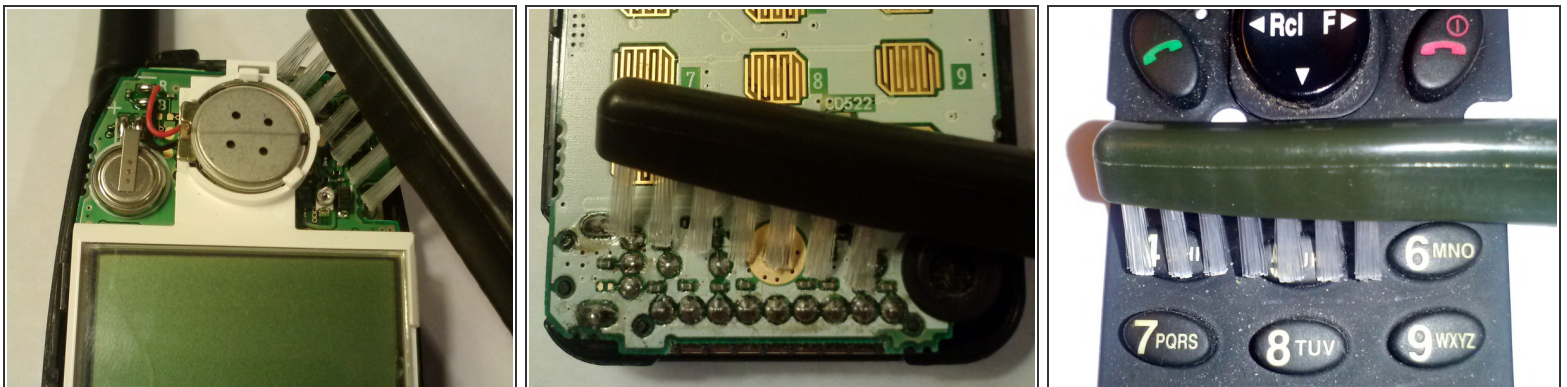

- Use a brush, like a tooth brush.
- Go over the device with the brush to get into the places you cannot reach with your hands/fingers.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-09 08:58:35 PM.